


# MACE DOPPLER INSERT VELOCITY SENSOR

Insert velocity sensor for use in full pipes 4" to 100" in diameter

PART No. 825-336 Rev. 1.0


Part No.	Cable Length*	Process Fitting	Sensor Wetted Materials
850-009	10m Cable	2" BSP	Nickel Plated Brass and Epoxy
850-016	20m Cable	2" BSP	Nickel Plated Brass and Epoxy
850-127	30m Cable	2" BSP	Nickel Plated Brass and Epoxy
850-128	50m Cable	2" BSP	Nickel Plated Brass and Epoxy
850-112	10m Cable	2" NPT	Nickel Plated Brass and Epoxy
850-116	20m Cable	2" NPT	Nickel Plated Brass and Epoxy
850-133	30m Cable	2" NPT	Nickel Plated Brass and Epoxy
850-134	50m Cable	2" NPT	Nickel Plated Brass and Epoxy

\*Cables are only available in these fixed lengths  
DO NOT CUT CABLE AS PERMANENT SENSOR DAMAGE MAY OCCUR

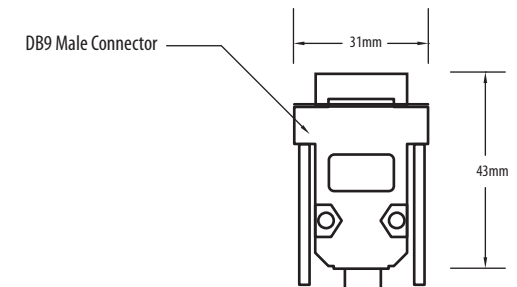

**WARNING**  
DO NOT CUT CABLE  
KEEP DRY  
DO NOT ALLOW moisture to enter connector end at any time.

9mm Urethane Cable  
(Various Cable Lengths)

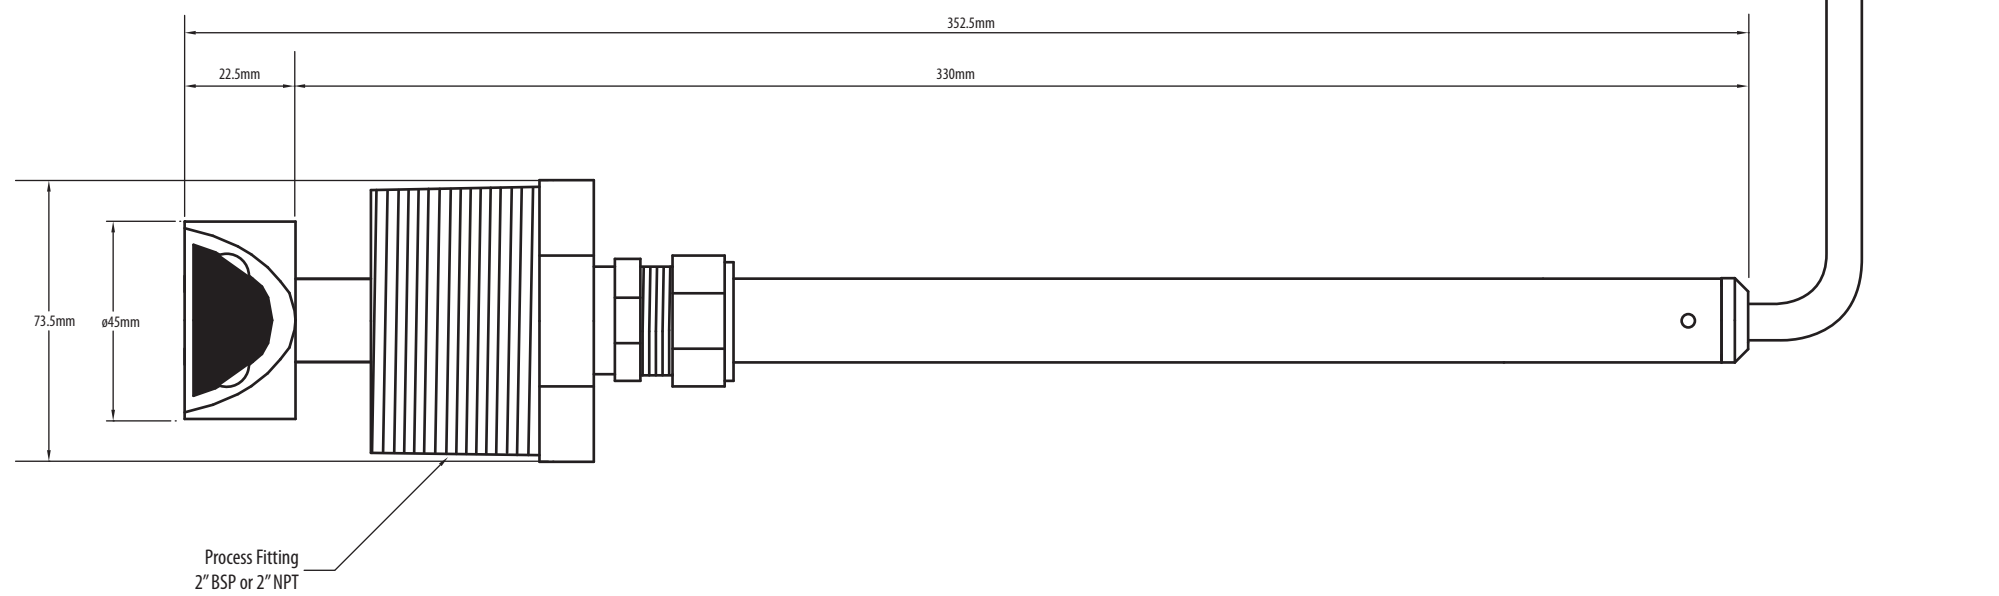

## Measuring & Control Equipment (MACE) Pty Ltd

P.O. Box 911, Pennant Hills, NSW 1715, Australia  
Ph: +61 (0)2 9658 1234 Fax: +61 (0)2 9651 7989  
Email: sales@macemeters.com www.macemeters.com

## Mace USA LLC

PO Box 7144, Overland Park, KS 66207, United States of America  
Ph: 888 440 4215 Fax: 888 440 6999  
Email: sales@maceusa.com www.maceusa.com

