

HVFlo

XCi

Portable Waterproof Logging Flow Meter

HVFlo XCi features MACE Doppler ultrasonic velocity sensors utilizing MACE Advanced Signal Processing (MASP) technology that “see” across the entire stream profile to give a true average velocity. MASP allows HVFlo XCi to produce superior results under a very wide range of hydraulic operating conditions. Even under full pipe, surcharge, or reverse flow conditions, HVFlo XCi will produce accurate, repeatable results every time.

A MACE WebComm card can be installed to give remote access to your data via GSM/3G cell networks. WebComm alarms allow users the ability to send SMS or email alarms to an unlimited number of personnel within an organisation.

Benefits


- The HVFlo XCi operates under a very wide range of hydraulic conditions, and will produce accurate, repeatable results even under full pipe, surcharge or reverse flow conditions
- Lightweight for easy handling
- Rechargeable battery offers long-life without costly new batteries
- Excellent data storage, typically 2 years @ 5 minute logging
- Typically 180 day battery discharge cycle @ 5 minute logging
- IP68

Applications

- Inflow & Infiltration Studies
- Combined Sewer Overflow Studies
- Pump Station Monitoring
- Long & Short Term Sewer Flow Monitoring
- Sewer System Capacity Analysis
- Storm Water monitoring
- Industrial discharge monitoring
- Quantifying Rehabilitation Effectiveness
- Billing Networks
- Compliance metering



HVFlo XCi is a high performance battery operated open channel flow monitoring solution for wastewater, stormwater and industrial discharge applications

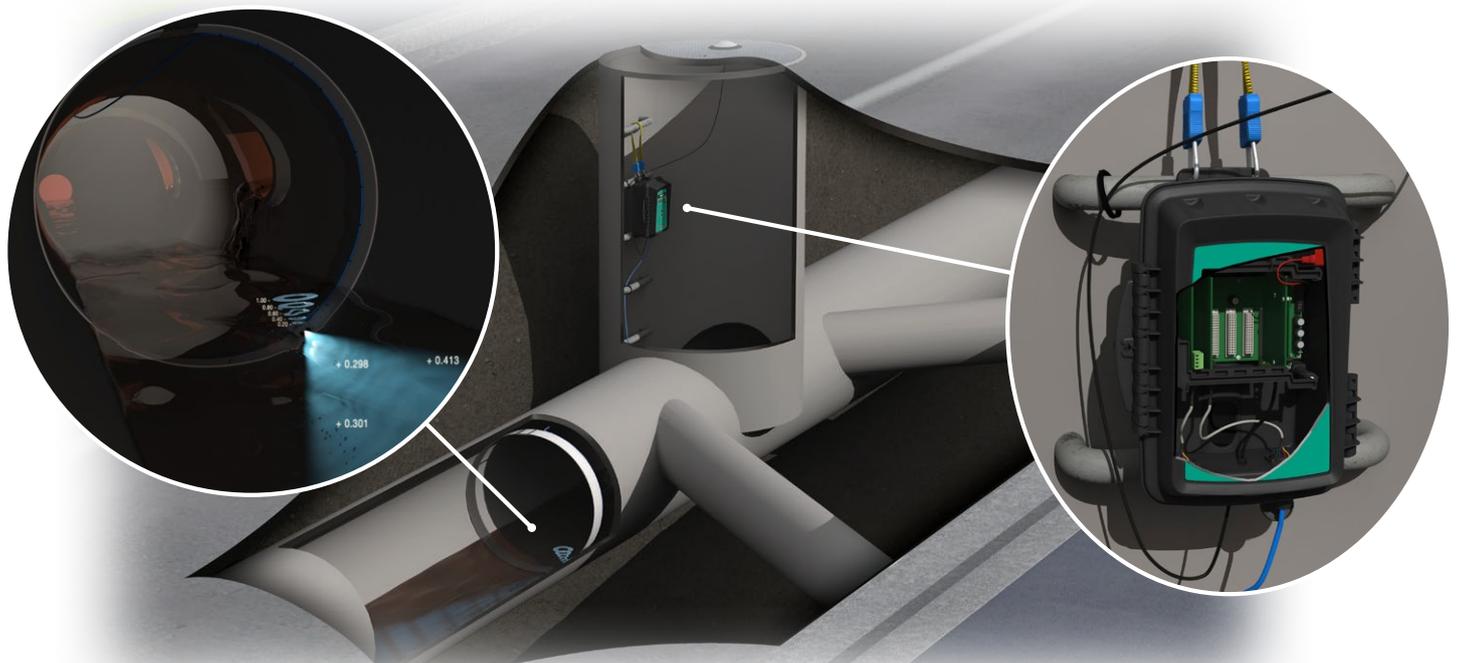

HVflo Xci Specifications



GENERAL

| | |
|---|---|
| Weight | Approx. 5 kg (11 lbs) |
| Dimensions | 365 mm (H) x 260 mm (W) x 170 mm (D) 14.4 in. (H) x 10.2 in. (W) x 6.7 in. (D) |
| Enclosure rating | IP68 |
| Enclosure material | UV stabilized polycarbonate - vented to atmosphere |
| Operating temperature (with internal battery installed) | -15 to +50° C (5 to 122° F) |
| Operating temperature (with internal battery removed and external power used) | -20 to +65° C (-4 to 150° F) |
| Program memory | 2 Mb flash (sufficient for 600,000 discrete readings) |
| Data storage | Typically 2 years data logging - 3 parameters @ 5 min |
| Power source | Internal 12Volt 7.2Ah battery |
| Power usage | Typically 180 days at 5 minute intervals with daily data upload via MACE WebComm |
| Units of measure | User definable (metric/US) |
| Application software | FloCom+ PC software for system configuration, data downloading and velocity profile testing. Minimum system requirements - Windows® XP |
| Remote communications | MACE WebComm card via GSM/3G cell networks |
| Factory backup | 24 months - parts and labour guarantee |


DEPTH MEASUREMENT

| | |
|----------------------|---|
| Method | Ceramic pressure transducer with large flat sensing diaphragm which allows straight, undeflected flow over the sensing area to reduce drawdown effects at high stream velocities and provides for self cleaning with an impervious Alumina ceramic surface. |
| Full scale range | 4 m (13 ft.) above the transducer face |
| Accuracy | 0.2% of full scale at constant temperature in a static stream. 1% of full scale over a stream 5 to 55° C (41 to 130° F) |
| Resolution | 1 mm (0.04 in.) |
| Overrange | 60 m (200 ft.) without damage |
| Min. operating depth | 20 mm (0.79 in.) |

VELOCITY MEASUREMENT


| | |
|----------------------------|--|
| Method | Submerged Ultrasonic Doppler |
| Range | ±0.025 to ± 8.0 m/s (±0.08 to ± 26 ft/s) |
| Resolution | 1 mm at 1.0 m/s (0.04 in. at 3.3 ft/s) |
| Accuracy | ±1% up to 3.0 m/s (±1% up to 10ft/s) |
| Urethane sensor cable | 9 mm (D) up to 50 m (L) (0.35 in. (D) up to 164 ft. (L)) |
| Min. operating depth | 40 mm (1.57 in.) |
| Max. operating temperature | 60° C (140° F) |

DOPPLER AREA/VELOCITY SENSOR



ZX SnapStrap mounted, combined velocity and depth sensor for use in partially full pipes or open channels

| | |
|---------------------|--|
| Pipe size | 0.15 to 2.54 m (6 in. to 100 in.) diameter |
| Max. channel width* | 3 m (10 ft.) |
| Dimensions | 125 mm (L) x 50 mm (W) x 20 mm (H) 5 in. (L) x 2 in. (W) x 0.79 in. (H) |
| Wetted materials | PVC, Alumina ceramic and epoxy |
| Pipe intrusion area | 8.6 cm ² (1.33 in ²) |




DOPPLER VELOCITY SENSOR

ZX SnapStrap mounted, velocity sensor for use in full pipes or open channels (when used in conjunction with a depth sensor)

| | |
|---------------------|--|
| Pipe size | 0.15 to 2.54 m (6 in. to 100 in.) diameter |
| Max. channel width* | 3 m (10 ft.) |
| Dimensions | 125 mm (L) x 50 mm (W) x 17 mm (H) 5 in. (L) x 2 in. (W) x 0.67 in. (H) |
| Wetted materials | PVC and epoxy |
| Pipe intrusion area | 8 cm ² (1.24 in ²) |

*MACE Doppler ultrasonic sensors **will** operate in wider channels, but a reliable stream gauging **must** be performed for best system accuracy.

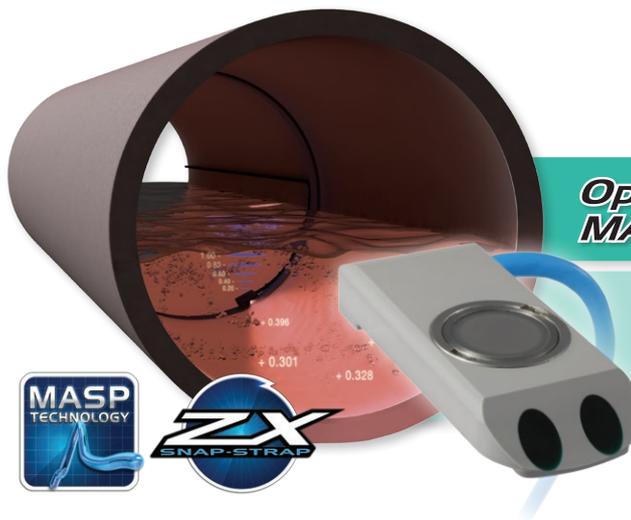

Open channel flow measurement MACE Area/Velocity Sensor

- ✓ Doppler ultrasonic area/velocity sensor with MASP technology
- ✓ Easy to install in existing pipe work with a MACE ZX SnapStrap
- ✓ Operates in regular and irregular cross-sections
- ✓ Reliable under difficult hydraulic conditions
- ✓ Replaceable ceramic diaphragm depth sensors

Note to end users: These specifications are subject to change at any time without notice. MACE takes no responsibility for the use of these figures. Please consult MACE for the latest specifications before using them in contract submittals or third party quotes etc. MACE reserves the right to change specifications without prior warning. All quoted figures are based on test conditions and are subject to variation due to site conditions.

www.macemeters.com

MACE - Australia
Unit 19 / 276 New Line Road
Dural, Sydney, NSW 2158, Australia
Phone: +61 2 9658 1234
Email: sales@macemeters.com

MACE - United States of America
In-Situ Inc. 221 East Lincoln Avenue
Fort Collins, CO 80524, USA
Phone: 1-800-446-7488
+1-970-498-1500
Email: sales@in-situ.com

mace

An **In-Situ** Company